

Adaptable, Instant Sensitivity



REMOTE TRIGGER PULL TYPE 157 050

The Remote Trigger Pull has been designed to fire weapons remotely from the safety of the control room in conjunction with 157 001AS.

The remote trigger pull has a programmable trigger pull distance and a trigger hold time set in a menu. The trigger hold time is used to fire a burst of rounds that have been loaded in to the weapon.

There are two safety parts to the system: one is a flashing red strobe on the top of the unit to show that the system is live or safe, and the second is a safety key switch that you set to safe and remove key when loading the weapon.


COMPACT AND RELIABLE

HARDWARE

- **Safety**
The 157 firing system is the safest way of firing weapons.
- **Weapons that can be fired**
All weapons that have a trigger can be fired with this system. Rifles, Hand guns, 0.50" BMG A2

SPECIFICATION

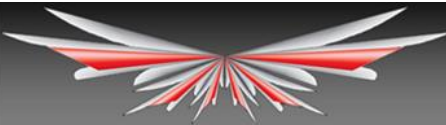

HARDWARE	
Trigger Pull Distance	5mm – 50mm
Trigger Hold Time	1 – 5 Seconds
POWER/COMMS	
Power	110 – 240V ac ±10% @ 15W
ENVIRONMENT	
Operating Temperature	0°C - +50°C [-32 °F - +122 °F]
DIMENSIONS	
L x W x H	260mm x 150mm x 100mm [10.2in x 5.9in x 3.9in]
Weight	8.8kg [14.2lbs]




MS INSTRUMENTS Range Consultancy

Precision, Expertise, Quality

- Professional Bespoke Range Designs
- State-of-the-Art Product Rendering
- Only the Latest Standards



MS Instruments Ltd.

Unit 4, Ravensquay Business Centre, Cray Avenue
Orpington, Kent, BR5 4BQ, United Kingdom
Tel: +44 (0)1689 883 020
Fax: +44 (0)1689 871 392
contact@msinstruments.co.uk
www.msinstruments.co.uk

ISO 9001 SCS cert. No. 980010
157-050-remotetriggerpull - Jul-17

The information in this document is correct at the stated time. MS Instruments Ltd has a policy of continuing development and reserves the right to make design changes/improvements to the products.